402 Siries

For Special Application | – | SD card connector

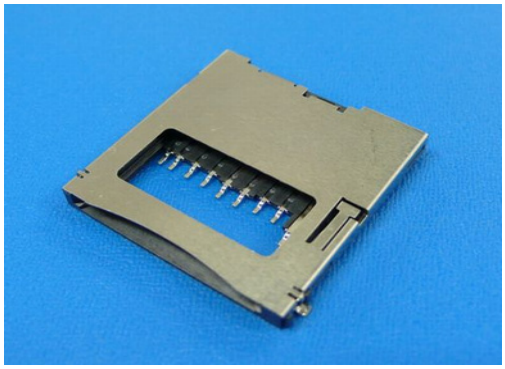

■Product Feature

1.Push-type of connectors with shutter:

It has a shutter installed at the entrance for a SD card, and prevents possible mischief, dust, dirt or foreign particles.

2.Insufficient insertion sensing instrument provided:

It has a shutter equipped with switch, which detects possible state of a SD card inserted insufficiently.

■Specifications

Voltage/Current rating	100V,0.5A(AC・DC)
Insulation resistance	1000MΩ MIN.
Contact resistance	80mΩ MAX.
Withstanding voltage	AC500V (for one minute)
Temperature range	−30℃～+85℃
Lock force （initial）	Lock force：29.4N MAX. Lock release force：29.4 N MAX.
Materials	Cover：SUS Housing：LCP,GF Terminal：Phosphor bronze,portion Au plated

■Socket

Poles	Product name
9	140203109K3

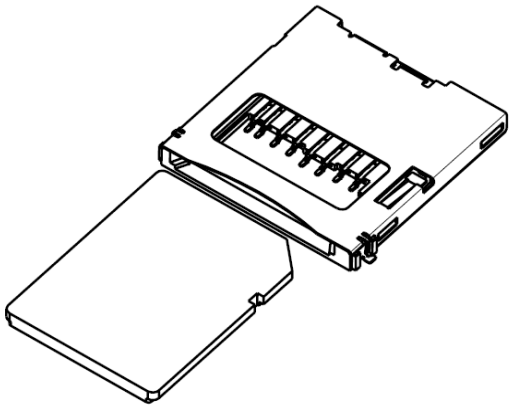

■Socket

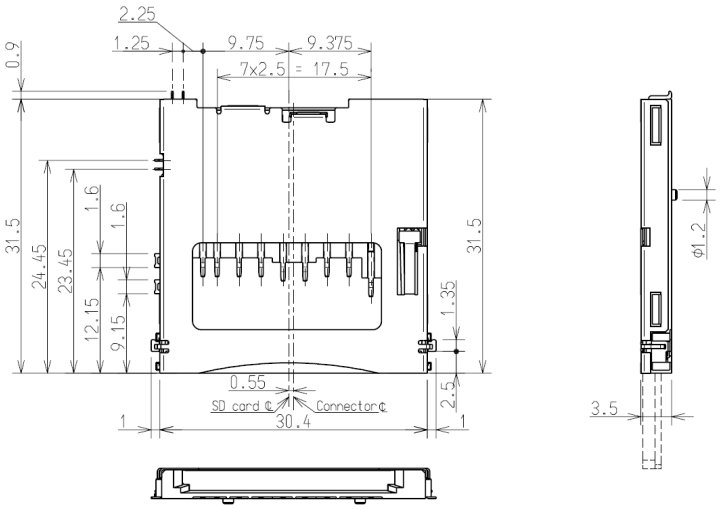

■P.W.B layout

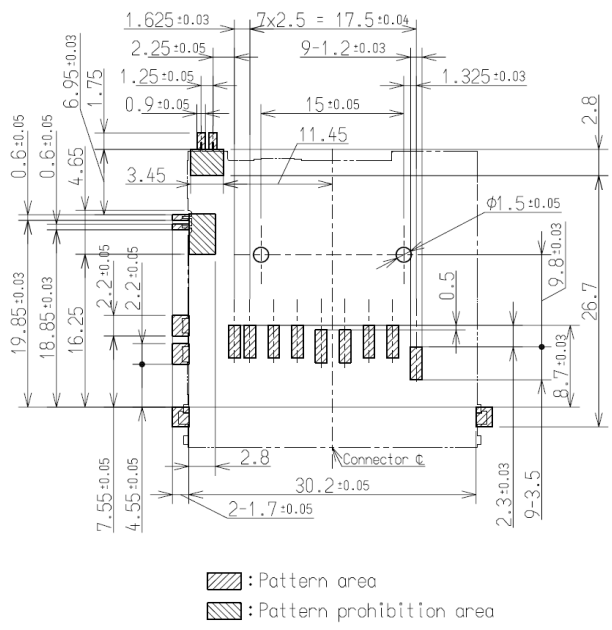

＊All the figures relative to the product information indicated herein on our website are to represent respective model ranges(or series), and may as well be treated as reference figures only.
We take the liberty to call your kind attention to the fact that our products and/or specifications may change without previous notice due to unavoidable circumstances.
If you determine to use or adopt a product thereof, we would appreciate you contacting our Sales & Marketing Division for confirmation of the up-to-date specifications for delivery.

Copyright 2004-2008 ,Taiko Denki Co.,Ltd. All rights reserved.